


THIS DOCUMENT CONTAINS INFORMATION PROPRIETARY TO GENESIS FILTRATION CORPORATION. ANY REPRODUCTION, DISCLOSURE, OR USE OF THIS DOCUMENT IN WHOLE OR IN PART IS EXPRESSLY PROHIBITED EXCEPT AS GENESIS FILTRATION CORPORATION MAY OTHERWISE AGREE TO IN WRITING.

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED

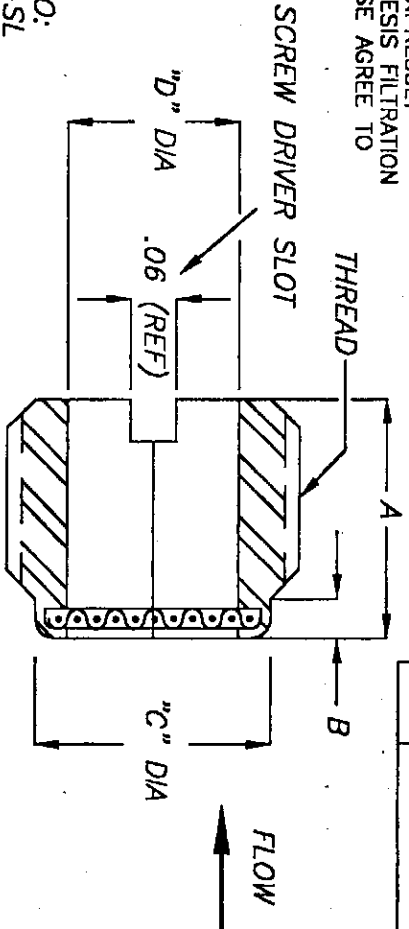

- Δ DASH NO.	NOMINAL MICRON RATING	ABSOLUTE MICRON RATING
- 2	2	15
- 5	5	18
- 10	10	25
- 20	20	45
- 40	40	70
- 70	70	105
- 105	105	150
- 145	145	205

EXAMPLE PART NO:
10261-4-10-D-SL

ADD "SL" TO PART NO FOR SELF LOCKING PATCH OPTION

ADD "D" TO PART NO FOR ALUM HOUSING OPTION

10 MICRONS NOMINAL

1. SELF LOCKING PATCH AVAILABLE.
2. MATERIALS: FILTER DISC, AISI T 300 SER. CRES. INSERT: AISI T 300 SER. CRES OR ALUM ALLOY ANODIZED.
3. CONSTRUCTION: FILTER DISC IS SPIN SWAGED INTO INSERT.
4. FILTER MEDIA: SINTERED STAINLESS STEEL WOVEN WIRE MESH.
5. SECOND DASH NUMBER SPECIFIES NOMINAL MICRON RATING.
6. FIRST DASH NUMBER SPECIFIES SIZE.

- Δ SIZE	THREAD T	A	B	C	D
- 3	3/8-24	.21	.06	.313	.22
- 4	7/8-14	.27	.07	.365	.27
- 5	3/4-16	.27	.07	.427	.33
- 6	9/16-18	.29	.07	.482	.39
- 8	1/2-20	.33	.08	.659	.56
- 10	7/16-20	.36	.09	.772	.67
- 12	1 1/16-12	.43	.10	.945	.85

UNLESS OTHERWISE SPECIFIED		DO NOT SCALE THIS DWG. INTERPRET DWG PER IAW DOD-STD-1000 DIMS & TOLS. PER ANSI Y14.5		DFT BY:	
DIMENSIONS IN INCHES REMOVE ALL BURRS		SURFACE ROUGHNESS PER ANSI B46.1		DESIGN BY:	
MACHINE RADII .005/.015 R.		100 \checkmark		APPVD BY:	
BREAK ALL SHARP EDGES .002/.010 R.		MATERIAL NOTED		CUSTOMER NAME	
DECIMALS .XX		ANGLES		CUSTOMER P/N	
FRAC		FINISH			
TITLE		Genesis Filtration Inc. 9757 7th STREET, UNIT 804 Rancho Cucamonga, CA 91730			
SIZE A		FSCM NO. 04AX3		DWG NO. 10261- Δ - Δ	
SCALE		WEIGHT		SHEET OF	
REV		THREAT INSERT			